

The best end result begins
with the Herder mowing bucket



MOWING BUCKET MR



Achieve more with the Herder mowing bucket

Everyone wants a good mowing result, but everyone also wants an attractive price tag. With its fifth generation 'MR' mowing buckets, Herder proves you can achieve both. Herder mowing buckets have been developed to perform to the full in all conditions.

This starts with the carefully considered design of the bucket and all the moving parts. Furthermore, only high-quality materials are used, guaranteeing a long service life. A unique design, the use of the best materials, combined with craftsmanship, deliver an unparalleled work tool. A mowing bucket that performs everywhere, all the time. The MRL Mowing Bucket, a lighter version of the mowing bucket, is ideal for the Herder Grenadier and medium-sized excavators. The MRZ Mowing Bucket, the heavier version, is suitable for wheel and crawler excavators. You can also choose from different widths, from 2.5 to 5.5 metres. You can even reach widths of up to 8.6 metres by combining two mowing buckets. The Herder range also has two 'ultra light' models, in working widths of 2 and 2.5 metres. They are highly suitable for mini excavators in connection with weight and stability. You simply achieve more with the Herder mowing bucket.



A Herder mowing bucket on a Herder Grenadier: 2 premium products from the Herder range.



The Herder mowing bucket can be attached directly to the excavator.




An excavator with the mowing bucket on an extension piece for extra reach.



Details - mowing bucket - standard model




Low-maintenance knife head connection with standard long knife attachment.

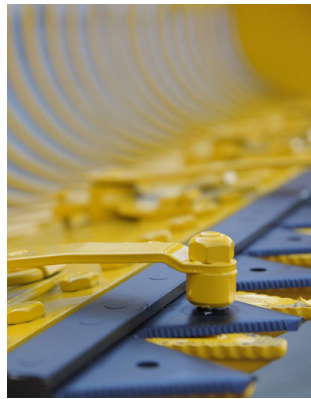

Cutter bar with spring pressure holder for continuous knife pressure.



The mowing bucket driving gear is fixed by means of 12 bolts.




Comes as standard with low-maintenance self-sharpening T knives.


Mowing bucket options



The volume of the mowing bucket can be increased with extension and side racks.

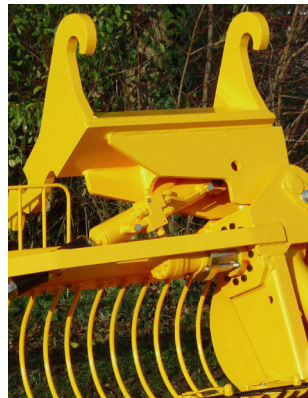

The mowing bucket can have a Herder connection or an excavator connection as required.



G knives that you can sharpen yourself are available as an option. Herder can supply special grinders for them if desired.



A mowing bucket with a working width of 8.60 metres helps you achieve more in less time.



With the tilt cylinder you can keep the transport position inside 3 metres (maximum allowable width) for the 4.3 and 5.5 metre mowing buckets.



TECHNICAL SPECIFICATIONS

Application	Type/width in cm	Frame height in cm	Oil consumption in L/min.	Weight in kg
Mini excavators	MSFT200.B	40	approx. 22	approx. 190
	MSFT250.B	40	approx. 22	approx. 215
Tractors/	MRLT 250.B	52	approx. 40	approx. 303
Medium excavators < 8 tonnes	MRLT 300.B	52	approx. 40	approx. 328
	MRLT 430.B	52	approx. 40	approx. 403
	MRLT 550.B	52	approx. 40	approx. 483
Excavators > 8 tonnes	MRZT 250.B	52	approx. 40	approx. 331
	MRZT 300.B	52	approx. 40	approx. 360
	MRZT 430.B	52	approx. 40	approx. 447
	MRZT 550.B	52	approx. 40	approx. 538

Maximum allowable oil pressure: 170 bar.



You will achieve more with Herder

MAAIKEN-01

www.herder.nl