


# Sandvik RC tools drill pipes

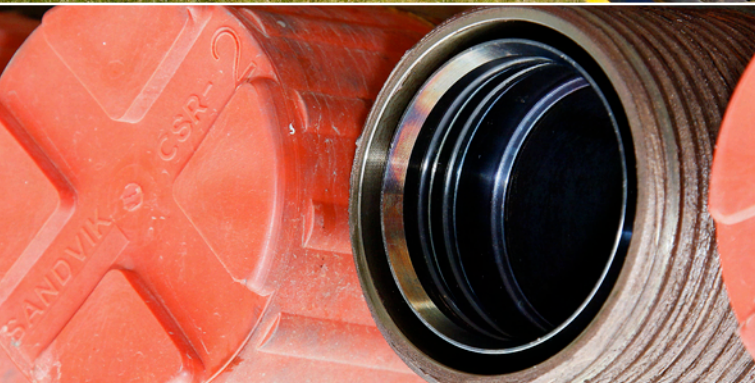

Sandvik is pleased to release its RC rods globally, with the widest range of thread connections and sizes to cover and service the entire RC market. Our drill pipes are specifically engineered to work with our industry leading patented RC Hammers. In addition, we offer complete drill string components, from air swivels, hammers and bits, to complete drill rigs solutions, to suit any customer requirements; in other words, the complete Sandvik RC kit! Backed by our global presence, Sandvik offers reliable customer service and support.

Sandvik offers you significant and tangible benefits with its drill string components:

- Drill pipes are specifically engineered to work with our industry leading patented RC Hammers
- Leading technology and intellectual property
- State of the art manufacturing equipment
- Efficient and reliable delivery times
- Quality assured products
- A thorough understanding of RC drilling applications



## QUALITY OUTER AND INNER TUBE MATERIAL:

Ultrasonically inspected submerged arc welds provide a high strength product and a greater wear resistance for longer life.

## TOOL JOINTS:

Premium grade alloy bar: Tool joints of the outer and inner tubes are manufactured with heat treated alloy bar. Joints to the tube use a proprietary process that ensures concentricity and axial alignment.

## FEATURES:

- Mounting system of the inner tube
- Rubber shock system.
- Easy to assemble/disassemble.
- Heat treated tool joints.
- Working pressure 750 PSI +.
- Locking System
- Wide range of sizes and threads

## Pieces and part numbers:

Type / Thread	Remet 3 1/2"	Remet 4"	Remet 4 1/2"	Metzke 4"	Metzke 4 1/2"	Matrix 4"	Matrix 4 1/2"	CSR1 4 1/2"	CSR2 4 1/2"	Faber 4 1/2"
RC Rod 3.0 m	RDM31230RE1-458	RDM40030REP-505	RDM41230REP-444	RDM40030MEP-529	RDM41230MEP-659	RDM40030MAP-429	RDM41230MAP-420	RDM41230C1P-494	RDM41230C2P-351	RDM41230FAP-571
RC Rod 6.0 m	RDM31260RE1-458	RDM40060REP-505	RDM41260REP-444	RDM40060MEP-559	RDM41260MEP-659	RDM40060MAP-429	RDM41260MAP-420	RDM41260C1P-494	RDM41260C2P-351	RDM41260FAP-571
Inner tube 3.0 m	RA45IT0150-0458	RA45IT0200-0505	RA45IT0200-0443	RA45IT0200-0529	RA45IT0200-0658	RA45IT0200-0429	RA45IT0212-0578	RA45IT0200-0278	N/A	RA45IT0212-0574
Inner tube 6.0 m	RA45IT0150-0460	RA45IT0200-0506	RA45IT0200-0444	RA45IT0200-0559	RA45IT0200-0659	RA45IT0200-0430	RA45IT0212-0579	RA45IT0200-0494	N/A	RA45IT0212-0571
Oring kit (100 pcs.)	5900000602	5900000602	5900000602	5900000602	5900000602	5900000602	5900000602	5900000602	5900000602	5900000602
Circlip kit (25 pcs.)	5900000655	5900000655	5900000655	5900000655	5900000655	5900000655	5900000655	5900000655	5900000655	5900000655

## Measurements:

Type / Thread	Remet 3 1/2"	Remet 4"	Remet 4 1/2"	Metzke 4"	Metzke 4 1/2"	Matrix 4"	Matrix 4 1/2"	CSR1 4 1/2"	CSR2 4 1/2"	Faber 4 1/2"
Outer tube OD	88.9 mm	101.7 mm	114.3 mm	101.7 mm	114.3 mm	101.7 mm	114.3 mm	114.3 mm	114.3 mm	114.3 mm
Outer tube I.D.	81.8 mm	94.6 mm	107.2 mm	94.6 mm	107.2 mm	94.6 mm	107.2 mm	107.2 mm	107.2 mm	107.2 mm
Outer tube W.T	5.3 mm	7.1 mm	7.1 mm	7.1 mm	7.1 mm	7.1 mm	7.1 mm	7.1 mm	7.1 mm	7.1 mm
Inner tube O.D.	38.1 mm	50.8 mm	63.5 mm	50.8 mm	63.5 mm	50.8 mm	63.5 mm	63.5 mm	63.5 mm	63.5 mm
Inner tube I.D.	32.6 mm	45.3 mm	58 mm	45.3 mm	58 mm	45.3 mm	58 mm	58 mm	58 mm	58 mm
Inner tube W.T	5.5 mm	5.5 mm	5.5 mm	5.5 mm	5.5 mm	5.5 mm	5.5 mm	5.5 mm	5.5 mm	5.5 mm
Spanner Flat A/F.	90 mm	90 mm	90 mm	90 mm	90 mm	90 mm	90 mm	90 mm	90 mm	90 mm
Weight rod 3.0 m (ea.)	75 kg	75 kg	95 kg	75 kg	95 kg	75 kg	95 kg	95 kg	95 kg	95 kgs
Weight rod 6.0 m (ea.)	120 kg	150 kg	168 kg	150 kg	168 kg	150 kg	168 kg	168 kg	172 kg	172 kgs
Bundle Qty 3.0 m	30 pcs	30 pcs	20 pcs	30 pcs	20 pcs	30 pcs	20 pcs	20 pcs	20 pcs	20 pcs
Bundle Qty 6.0 m	10 pcs	10 pcs	10 pcs	10 pcs	10 pcs	10 pcs	10 pcs	10 pcs	10 pcs	10 pcs
Bundle weight 3.0 m	2250 kg	2250 kg	1900 kg	2250 kg	1900 kg	2250 kg	1900 kg	1900 kg	1900 kg	1900 kg
Bundle weight 6.0 m	1200 kg	1500 kg	1680 kg	1500 kg	1680 kg	1500 kg	1680 kg	1680 kg	1720 kg	1720 kg

